




ONE-LOK™ Series SLDE for Ductile Iron Pipe

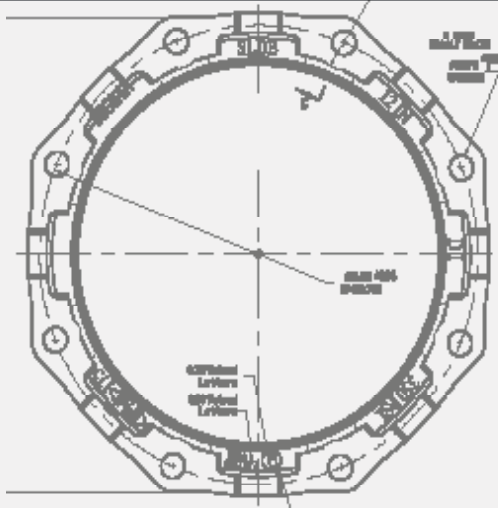

ONE-LOK's unique cam action allows the restraining wedges to "rock," gripping the pipe wall more securely as thrust force increases.



ONE-LOK's cam action also accommodates deflection of the joint during installation, and also allows for subsidence, seismic or other forces after installation, up to the maximum allowed deflection.

Features & Advantages:

1) The SIGMA ONE-LOK Series SLDE is a mechanical joint restraining gland that implements a series of individually activated wedges into the mechanical joint follower gland. When the wedge segment is engaged by the actuating bolt, the primary contact edges of each wedge segment lock onto the pipe wall. This action causes the primary contact edges to grip the pipe and effectively restrain all classifications of ductile iron pipe.

2) ONE-LOK SLDE's precision contoured wedges provide proper contact and support of the ductile iron pipe wall. Each wedge is manufactured with an elongated contour that evenly matches the outside circumference of each nominal diameter of ductile iron pipe. This elongated contour also eliminates the concern of damage to both the pipe wall and the interior cement mortar lining caused by point loading, even on the thinner pressure classes of ductile iron pipe.

3) ONE-LOK SLDE's wedge actuating bolt provides the installer with a visual torque indicator. The breakaway top ensures proper engagement of the wedge segment at the time of installation. Unlike other actuating bolts, the ONE-LOK SLDE is manufactured with a proprietary quality control system that ensures the breakaway tops will activate at the correct torque. The breakaway top is sized to match the same dimensions of the bolts and nuts used to assemble the mechanical joint fitting and follower gland, eliminating the need for special installation tools. Once engaged, the actuating bolt leaves a residual hex-head shank, allowing post-installation disassembly of the restrained joint, if necessary.

4) ONE-LOK SLDE's unique wedge segment and actuating bolt design allows the two components to interface using a cam action principle, allowing the wedge segments to rock and increase their grip on the pipe wall as thrust on the assembled joint increases. This also allows improved resistance to subsidence, seismic forces, and other movement within the maximum deflection limitations of the mechanical joint under applicable AWWA standards.

Deflection Chart

Nominal Size	Item #	Deflection
3-12"	SLDE3-SLDE12	5 deg
14-16"	SLDE14-SLDE16	2 deg
18-30"	SLDE18-SLDE30	1.5 deg
36-64"	SLDE36-SLDE64	1 deg


ONE-LOK™ Series SLDE for Ductile Iron Pipe

Sample Specification:

Restraint for standard mechanical joint fittings shall be incorporated in the design of the follower gland and shall utilize multiple wedge segments that act against the pipe, increasing their resistance as the line pressure increases. The assembled joint shall maintain the maximum flexibility and deflection of all nominal pipe sizes after burial. Restraining gland, wedge segments, and actuating bolts shall be manufactured of high strength ductile iron conforming to the requirements of ASTM A536, Grade 65-45-12. Wedge segments shall be heat treated to a hardness of 370 BHN minimum. Dimensions shall be compatible with standardized mechanical joints conforming to the requirements AWWA C111/ANSI A21.11 and AWWA C153/ANSI 21.53 through 24" (latest revision). Breakaway tops shall be incorporated in the design of the actuating bolts to visually ensure proper torque. The manufacturing of the actuating bolt must incorporate a quality control procedure that is deemed acceptable by the specifier and positively assures precise and consistent operating torque of the breakaway top. The mechanical joint restraining devices shall have a working pressure rating of 350psi (for sizes 3-16") and 250 psi (for sizes 18-64") minimum and provide no less than a safety factor of 2:1. Restraint shall be UL Listed and FM approved in applicable sizes. Restraining device shall be SIGMA ONE-LOK™ or approved equal.

Materials:

- Gland body, brackets, wedge segments & actuating bolts: ASTM A536 65-45-12 ductile iron.
- Wedge segments are heat treated to a minimum hardness of 370BHN
- T-head bolts & nuts: High strength, low alloy steel meeting AWWA/ANSI C111/A21.11 with minimum 65,000psi tensile strength and 45,000psi yield strength.

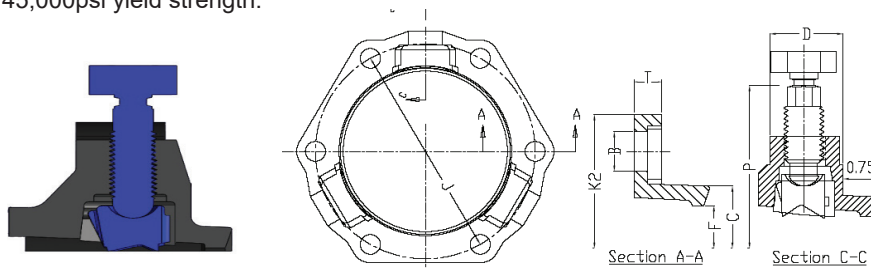

Dimensions in Inches, Weights in Pounds

Nom Pipe Size	Item #	Wgt	Pipe OD	Dimensions								Bolts and Inserts			Pressure Rating	T-bolts			Gasket	
				C	F	D	T	P*	B	J	K2	No	Size	Torque		No	Size	Torque	No	Item #
3	SLDE3	5.50	3.96	4.84	4.16	1.58	0.55	9.40	0.750	6.19	7.69	2	7/8	80-90	350	4	5/8 x 30	80-90	1	TG-3
4	SLDE4	6.50	4.80	5.92	5.00	1.58	0.55	10.24	0.875	7.50	9.12	2	7/8	80-90	350	4	3/4 x 35	80-90	1	MG-4
6	SLDE6	10.00	6.90	8.02	7.10	1.58	0.60	12.34	0.875	9.50	11.12	3	7/8	80-90	350	6	3/4 x 35	80-90	1	MG-6
8	SLDE8	14.50	9.05	10.17	9.25	1.63	0.75	14.32	0.875	11.75	13.37	4	7/8	80-90	350	6	3/4 x 40	80-90	1	MG-8
10	SLDE10	23.00	11.10	12.22	11.30	1.58	0.85	16.54	0.875	14.00	15.62	6	7/8	80-90	350	8	3/4 x 40	80-90	1	MG-10
12	SLDE12	29.00	13.20	14.32	13.40	1.58	0.85	18.80	0.875	16.25	17.88	8	7/8	80-90	350	8	3/4 x 40	80-90	1	MG-12
14	SLDE14	39.60	15.30	16.40	15.55	1.58	1.125	21.20	0.875	18.75	20.25	10	7/8	80-90	350	10	3/4 x 45	80-90	1	MG-14
16	SLDE16	49.67	17.40	18.50	17.54	1.77	1.21	23.74	0.875	21.00	22.50	12	7/8	80-90	350	12	3/4 x 45	80-90	1	MG-16
18	SLDE18	60.33	19.50	20.60	19.64	1.77	1.25	25.84	0.875	23.25	24.75	12	7/8	80-90	250	12	3/4 x 45	80-90	1	MG-18
20	SLDE20	69.00	21.60	22.70	21.74	1.87	1.25	27.94	0.875	25.50	27.00	14	7/8	80-90	250	14	3/4 x 50	80-90	1	MG-20
24	SLDE24	103.67	25.80	26.88	25.95	1.92	1.47	32.14	0.875	30.00	31.50	16	7/8	80-90	250	16	3/4 x 50	80-90	1	MG-24
30*	SLDE30	158.67	32.00	33.29	32.17	2.13	1.65	39.30	1.125	36.88	39.12	20	1.00	115-125	250	20	1 x 65	100-120	1	MGS-30
36*	SLDE36	234.50	38.30	39.59	38.47	3.15	1.75	46.07	1.125	43.75	46	24	1.00	115-125	250	24	1 x 65	100-120	1	MGS-36
42*	SLDE42	344.00	44.50	45.79	44.67	3.56	2.25	53.25	1.38	50.62	53.38	28	1 1/4	115-125	250	28	1 1/4 x 80	100-120	1	MGS-42
48*	SLDE48	456.00	50.80	52.09	50.97	3.81	2.25	59.55	1.38	57.5	60.26	32	1 1/4	115-125	250	32	1 1/4 x 80	100-120	1	MGS-48
54*	SLDE54	1045.00	57.56	58.85	57.73	6.00	4.50	70.43	1.375	63.20	67.50	18	1 1/2	400 +/- 5	250	36	1 1/4 x 110	150 - 200	1	MGS-54
60*	SLDE60	1136.00	61.61	62.90	61.78	6.00	4.50	74.52	1.375	67.72	72.00	18	1 1/2	400 +/- 5	250	36	1 1/4 x 110	150 - 200	1	MGS-60
64*	SLDE64	1258.00	65.67	66.96	65.84	6.00	4.50	78.68	1.375	71.86	76.00	19	1 1/2	400 +/- 5	250	38	1 1/4 x 110	150 - 200	1	MGS-64

ONE-LOK SLDE was previously referred to as model SLD

* Product is provided with SIGMASEAL™ improved mechanical joint gasket.

P* Dim shows OD after head is broken/removed.

Sizes 3"-12" is approved for thinnest class of DI pipe.



Sizes 3" - 36" are UL listed
 Sizes 4" - 12" are FM approved

Installation Instructions:

Note: This product is designed for use on ductile iron pipe. Contact SIGMA for use on plain end fittings.

1. Clean fitting socket and pipe end. Lubricate gasket and pipe end with soapy water (or approved pipe lubricant meeting AWWA C111). Install ONE-LOK™ restrainer on the pipe with the lip extension facing the pipe end, followed by the gasket, tapered side toward end of pipe.

NOTE: SIGMASEAL Gasket is recommended for ONE-LOK 30-64". When installing SIGMASEAL gasket, the tapered edges of the gasket must face away from the pipe wall.

2. Insert pipe into fitting outlet and seat the gasket firmly and evenly into the gasket cavity. Maintain a straight joint during assembly.

3. Push the ONE-LOK gland toward the fitting and center it around the pipe with the lip evenly against the gasket. Insert the T-bolts and hand tighten the nuts. If deflection is required, make up after joint assembly but before tightening T-bolts.

4. Tighten T-bolts in an alternating manner maintaining an even gap between the gland and the fitting face at all points around the socket. Repeat alternate tightening cycle of the t-bolts until one full cycle is completed where each individual t-bolt maintains the recommended torque.

5. Following proper assembly of the mechanical joint, hand tighten actuating bolts until all wedges make complete contact with the pipe.

6. Tighten each actuating bolt in a clockwise direction, alternating between the bolts in a star pattern, until the break-off tops have been removed. Never tighten a wedge bolt more than 180 degrees before moving to the next bolt.

LOCATIONS

Northeast Region

Cream Ridge, New Jersey (HQ)

700 Goldman Drive
Cream Ridge, NJ 08514
Phone (800) 999-2550
Fax (609) 758-1158
crmcsr@sigmaco.com

REPCO

970 DE LA Bastican
Victoriaville, Quebec G6T 1Y2
Phone (888) 744-6262
Fax (819) 758-1153
jboucher@repcoc.ca

Concord Supply

2353 Bowman Street
Innisfil, Ontario L9S 3V6
Phone (877) 436-3800
Fax (705) 436-6338
tanya@concordsupply.ca

Midwest Region

Sauk Village, Illinois

21699 Torrence Avenue
Sauk Village, IL 60411
Phone (888) 999-0420
Fax (708) 758-6790
chicsr@sigmaco.com

Southeast Region

Alexander City, Alabama

1500 Highway 22 W
Alexander City, AL 35010
Phone (800) 824-4513
Fax (256) 234-4956
alxcsr@sigmaco.com

Southwest Region

Houston, Texas

5000 Askins Lane
Houston, TX 77093
Phone (800) 999-0109
Fax (281) 987-0200
htncsr@sigmaco.com

Western Region

Ontario, California

4652 E. Guasti Road
Ontario, CA 91761
Phone (800) 688-6230
Fax (909) 391-2033
ontcsr@sigmaco.com


Auburn, Washington (Branch)

902 W Main Street
Auburn, WA 98001
Phone (800) 688-6230
Fax (909) 391-2033
ontcsr@sigmaco.com

www.sigmaco.com

Terms and Conditions of Sales available at our website.

AWWA Ductile Iron Fittings



- 2-64" C153 Ductile Iron Mechanical Joint Class 350
- 2-48" C110 Full Body Mechanical Joint
- 2-64" C110 Cast Iron/Ductile Iron Flanged Fittings
- 3-24" C153 TRIM TYTON® Compact Push On Fittings
- 4-24" C110 Full Body Push On Fittings
- C116 Fusion Bonded Epoxy lining available
- PROTECTO 401® ceramic epoxy lining available

Mechanical Joint Accessories




- Prepackaged and loose mechanical joint accessories
- SIGMASEAL™ improved mechanical joint gasket
- Snap-on multi-purpose gasket for ductile iron or PVC pressure pipes
- Ductile iron set screw retainer glands
- OMNI-SLEEVE™ improved wall penetration sleeve
- Specialty bolts and nuts for mechanical joint assemblies

ONE-LOK™ Wedge Action Restraints




- 3-48" ONE-LOK SLDE restraint for ductile iron pipe (import or domestic)
- 54"-60"-64" ONE-LOK SLDE restraint for ductile iron pipe (import)
- 3-36" ONE-LOK SLCE restraint for PVC pipe (import or domestic)
- 3-36" ONE-LOK SLDEH bell joint harness for ductile iron pipe
- 4-12" / 20" ONE-LOK SLDM restraint for oversized cast iron pipe
- 4-36" ONE-LOK SSLD split restraint for existing ductile iron pipe
- 4-36" ONE-LOK SSLDH split restraint harness for existing ductile iron pipe
- 3-12" ONE-LOK SLCEH bell joint harness for PVC pipe

PV-LOK™ Serration Lock Restraints




- 4-48" PV-LOK PWM Restraint for MJ Fitting to PVC pipe
- 4-48" PV-LOK PWP Restraint for PVC bell joint restraint
- 4-12" PV-LOK PWP Restraint for PVC bell joint restraint (domestic)
- 4-48" PV-LOK PVPF Restraint for PVC fitting to PVC pipe
- 4-12" PV-LOK PWH PVC bell joint harness
- 2-12" PV-LOK PVM Restraint for MJ Fitting to IPS PVC pipe
- 2-12" PV-LOK PVP Restraint for IPS PVC pipe bell joint
- 4-8" PV-LOK PVPF Restraints for IPS PVC pressure fitting

Flange Adapters



- 3-36" SIGMAFLANGE SFA flange adapter sleeve for PVC and DIP
- 2-48" ZIP FLANGE set screw style flange adapter

Municipal Construction Castings



- Manhole Rings and Covers
- Curb and Meter Boxes
- Frames and Grates
- Storm Inlets
- Valve Boxes, Risers, and Extensions

Products for the Ductile Iron Fabricator



- 3-64" High Hub Threaded Flanges
- 3-48" Tapped High Hub Threaded Flanges
- 3-36" Extra Heavy 250lb Drilled Threaded Flanges
- 3-48" Threaded MJ Bell Adapters
- 3-48" MJ x PE Bell adapter (2ft)
- 3-48" Anchor Flanges
- 3-16" Filler Flanges

Extended Range Products



- FLANGE-PAK™ prepackaged flange accessory sets
- Polyethylene encasement for ductile iron pipe
- Copper tubing products
- Tracer wire & detectable/non-detectable marking tape
- Pipe joint lubricant & hydraulic cement
- Socket clamps and tie rod accessories
- BOXLOK Valve Box Alignment Device
- Cast Iron Companion Flanges